



SUPPLEMENTARY MANUAL

for GPX-WSS

REMOVE THE FRONT MUDGUARD.
REMOVE THE HEADLIGHT FAIRING.




MOUNT THE WHEEL SPEED SENSOR
TO FRONT OR REAR WHEEL.
(SUGGESTED FOR MOUNT 3 PCS OF MAGNET
TO THE WHEEL WITH EQUAL DISTANCE SPACES)



CONNECT GPX RED WIRE TO
PINK WIRE OF PARKING LIGHT
CONNECTOR.
(TRANSPARENT, 2-POLE CONNECTOR
BEHIND HEAD LIGHT)

CONNECT GPX BLACK WIRE TO
BLACK WIRE OF PARKING LIGHT
CONNECTOR.
(TRANSPARENT, 2-POLE CONNECTOR
BEHIND HEAD LIGHT)

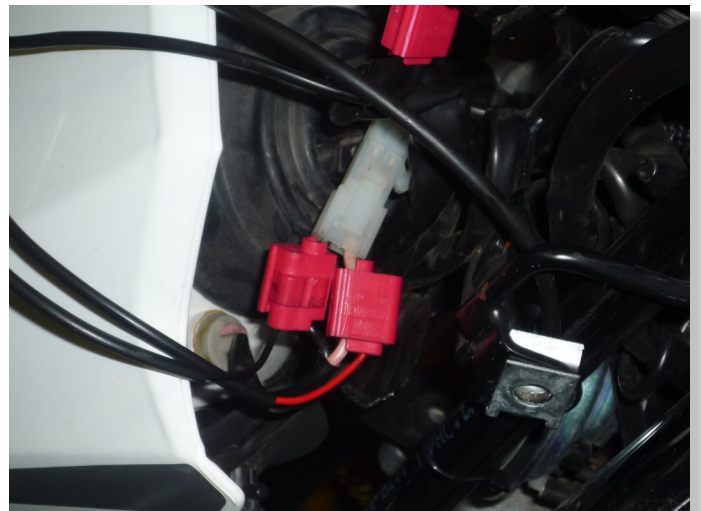


Yamaha XT125X

2005-2008



CONNECT GPX BLACK/GREEN WIRE
TO
GREEN/WHITE WIRE OF
DASHBOARD CONNECTOR.
(BLACK, PIN #8, BEHIND DASHBOARD)

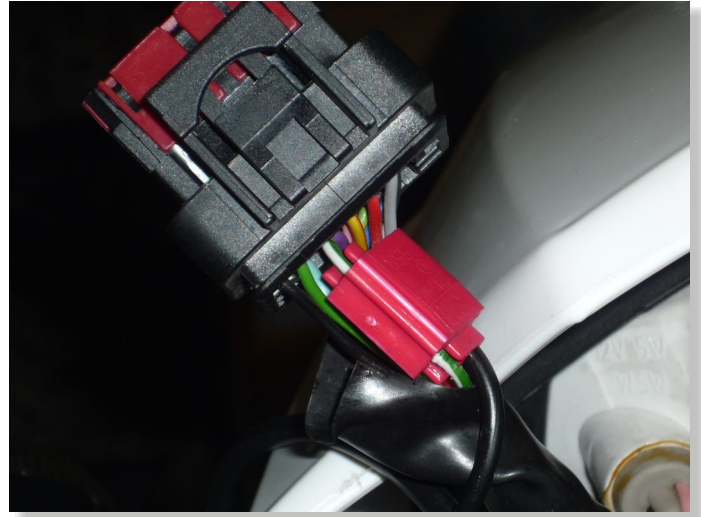

TYPICAL POSITION FOR THE
GEAR INDICATOR.

